


# 0707-1 Series



▶ Specification	▶ Inlet	
<b>Power Rating</b>	10A 250V AC Europe 15A 250V AC North America	
<b>Electric Strength</b>	AC 2,000V for 1 Minute	
<b>Contact Resistance</b>	30MΩ Max.	
<b>Insulation Resistance</b>	100MΩ Min. at 500V DC	
<b>Operating Temperature</b>	+100°C	
<b>Materials</b>	Thermoplastic UL Flammability 94V-0 & Copper Alloy	
<b>Mounting</b>	C : Side Screw-On	
<b>Terminal</b>	N : Solder Tab (4.0 x 0.8) Q : Solder Tab (4.8 x 0.8)	L2 : EMI Filter Application (View B) P : PCB Pin

Unit : mm

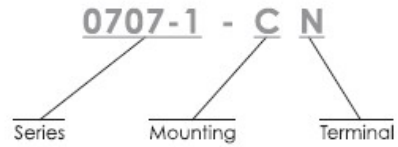