


0708-1 Series



Specification	Outlet	
Power Rating	10A 250V AC	
Electric Strength	AC 2,000V for 1 Minute	
Contact Resistance	30MΩ Max.	
Insulation Resistance	100MΩ Min. at 500V DC	
Operating Temperature	+70°C	
Materials	Thermoplastic UL Flammability 94V-0 & Copper Alloy	
Mounting	C : Crew-On	
Terminal	NF : Solder Tab (4.0 x 0.8) QF : Solder Tab (4.8 x 0.8)	PF : PCB Pin

Unit : mm

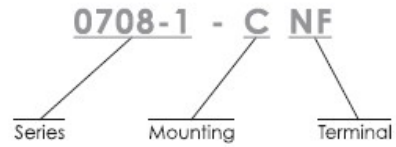